

SHERLOCK

Assembly Instructions

MANBBGC75 REV C 19/01/21

**SHERLOCK GARDEN CART
BBGC75**




SILVAN AUSTRALIA PTY. LTD.

ABN 48 099 851 144

www.sherlocklastslonger.com.au

FOR SERVICE SUPPORT PH 1300 745826
info@silvanaust.com

Parts Supplied

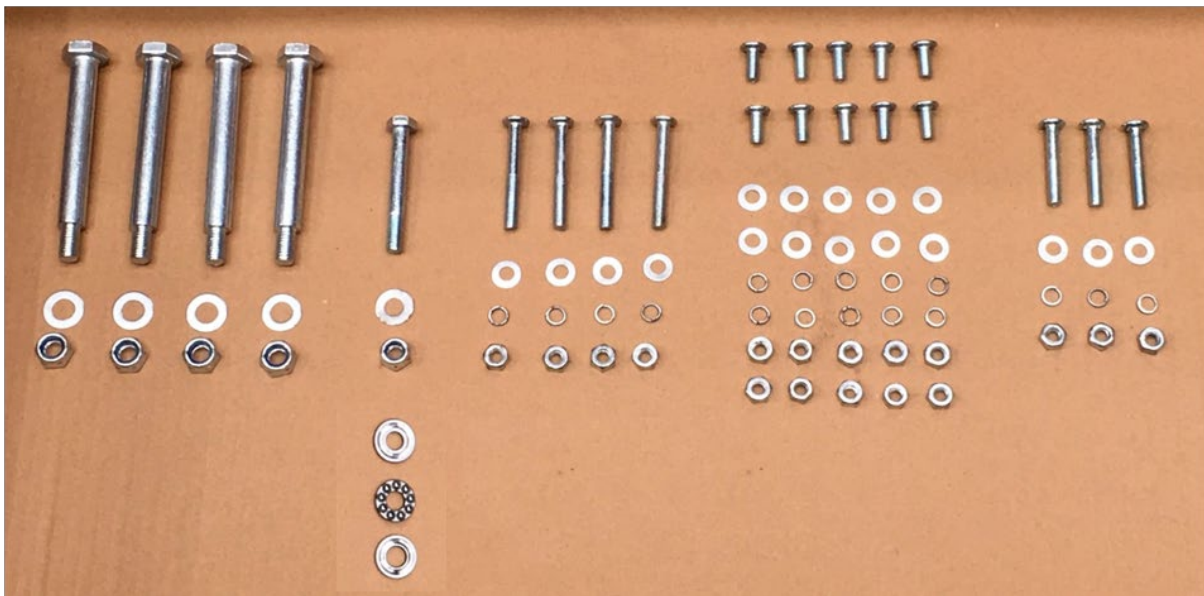

4 WHEEL AXLE BOLTS	1 PIVOT BOLT AND BEARING ASSY	4 FRAME BOLTS	10 TRAY BOLTS	2 TIPPING TRAY PIVOT BOLTS AND 1 TOW HANDLE FIXING BOLT
--------------------	-------------------------------	---------------	---------------	---


Assembly

IMPORTANT SAFETY INSTRUCTIONS

- When inflating tyres we recommend using a bicycle or foot pump to prevent over inflation.
- The maximum pressure is 30psi.
- Never use air compressors as the risk of over inflation and bursting is high.
- Do not allow children to use the cart without supervision, it is not a toy.

Step1.

Fit the handle and tray plate using the 10 Tray Bolts

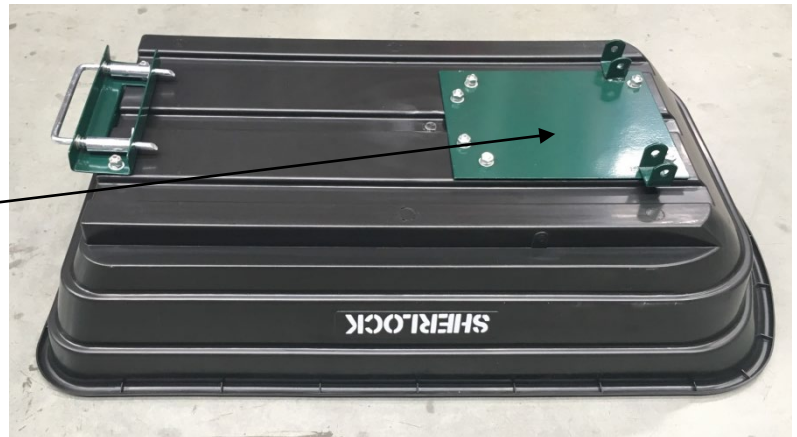

Step2.

Fit the chassis to the tray plate using 2 tipping tray pivot bolts. Then fit axle carrier with 2 holes to the chassis using 2 frame bolts.




Assembly

Step3.


Fit the pivot bearing between chassis and axle carrier with 3 holes.

The grooves of the 2 washers face inwards to cup the bearing

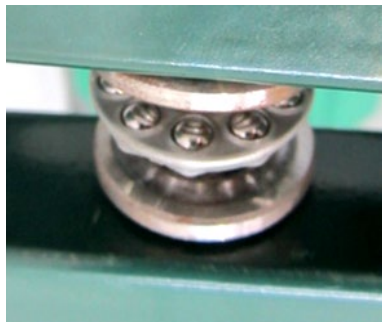

Step4.

Fit the axle "U" shaped tow bar to the bottom of the axle carrier with 3 holes using 2 frame bolts.

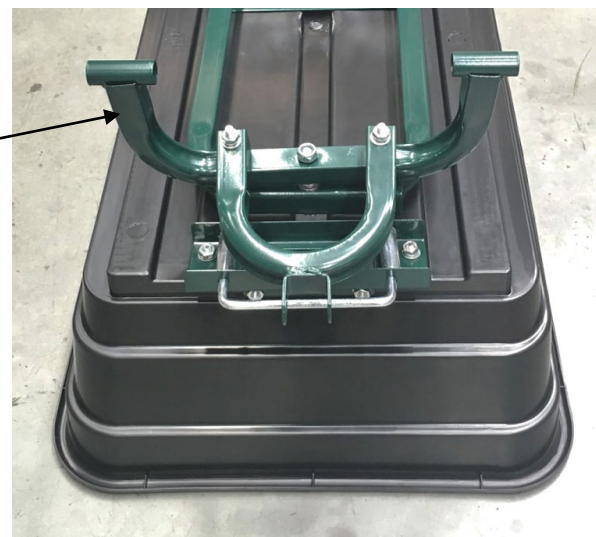

Step5.

Fit the tow handle and all wheels.

